




New energy Bearing Manufacturing Co.,...

45 mm x 75 mm x 16 mm NTN 6009ZZ deep groove ball bearings

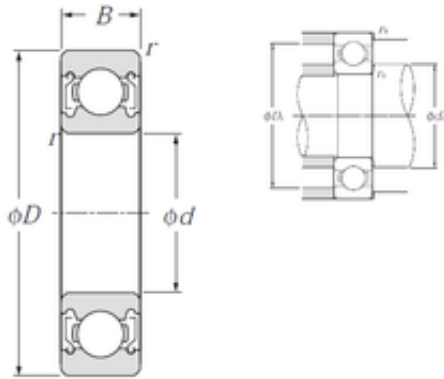

Bearing No. 6009ZZ

6009ZZ Bearing 2D drawings and 3D CAD models

Size	45x75x16 mm
Bore Diameter	45 mm
Outer Diameter	75 mm
Width	16 mm
d	45 mm
D	75 mm
B	16 mm
C	16 mm
rn	0,5 mm
r min.	1 mm
da min.	50 mm
da max	52,5 mm
Da max.	70 mm
ra max.	1 mm
Weight	0,237 Kg
Basic dynamic load rating (C)	21 kN
Basic static load rating (C0)	15,1 kN
(Grease) Lubrication Speed	9 200 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359003925
Product Group	B00308



New energy Bearing Manufacturing Co.,...

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	45MM Bore; 75MM Outside Diameter; 16MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Other Features	Deep Groove Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.53572
Bore	1.772 Inch 45 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
Outside Diameter	2.953 Inch 75 Millimeter
bore diameter:	45 mm
static load capacity:	11500 N
outside diameter:	75 mm



New energy Bearing Manufacturing Co.,...

precision rating:	ISO Class 0
overall width:	16 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Shielded
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	16 mm
snap ring included:	Without Snap Ring
outer ring width:	16 mm
internal clearance:	CN
maximum rpm (grease):	9200 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1 mm
dynamic load capacity:	21000 N
manufacturer product page:	Click here